



PERSONAL WORKGROUP DOCUMENT SCANNER **KV-S1026C**

- 30ppm / 60ipm* High-Speed Scanning
- 50 Page Automatic Document Feeder
- Plastic Card & Business Card Scanning
- 3 Customizable Single-Touch Scan Keys
- Ultrasonic Double-Feed Detection
- Double-Feed Skip Key
- Image Capture Plus Software
- 3-Year Advance Exchange Warranty

* Binary

Brilliant design for intuitive paper handling.

The Panasonic KV-S1026C scanner instantly transforms your paper documents to high-quality digital files, allowing you to simplify your records management, and making it easy to route documents to the destination of your choice with the touch of a button.

Compact design and intuitive operation make the KV-S1026C a perfect fit for small to medium size businesses, offering users straightforward set-up, innovative functionality and a host of advanced features. Like a cutting-edge paper feed mechanism equipped with Ultrasonic Double-Feed Detection and an Active Double-Feed Prevention Roller System that ensures reliable document feeding at an impressive scan speed of up to 30 pages per minute*.

The bundled Panasonic Image Capture Plus software suite helps users streamline their document management. This advanced software allows you to easily scan and preview your scanned images before exporting them to searchable PDF, TIFF or JPEG documents. Image Capture Plus also provides progressive features such as blank page removal, Zone OCR, automatic cropping and more!

* Binary



1.855.236.8041
panasonic.com/scanners

SOLUTIONS FOR BUSINESS

Fast

High-Speed Scanning

Routine scanning is fast and easy! Scan through piles of mixed documents quickly, effortlessly converting them into highly-accurate searchable PDFs and other file types.



Easy

Single-Touch Scan Keys

3 customizable preset keys simplify scan tasks. With the touch of a button, instantly start scanning documents and send them automatically to a destination of your choice.



Reliable

3-Year Advance Exchange Warranty


A standard 3-year warranty with overnight replacement & US-based tech support backs the reliability of our business-grade scanners.



Specifications

SCANNER TYPE		Duplex Sheet Feed Scanning
SCANNER TECHNOLOGY		1-Line CIS (Contact Image Sensor)
SCANNING SPEED*1 (Letter, Portrait)		Up to 30 ppm / 60 ipm (Binary 200 dpi)
		Up to 20 ppm / 40 ipm (Color 200 dpi)
RESOLUTION (Color and B/W)		Resolution : 100 - 600dpi (1dpi step)
		Optical : 300/600dpi
AUTOMATIC DETECTION		Ultrasonic Double-Feed Detection
IMAGE COMPRESSION		JPEG (Grayscale/Color)
IMAGE OUTPUT		Binary, Grayscale, Color, MultiStream (Color & Binary or Gray & Binary)
BINARY MODE HALFTONE		Dither, Error Diffusion
IMAGE CONTROL		Automatic Binary/Color Distinction, Multi Color Drop Out, Blank Page Removal, Double Exposure, Smooth Background, Automatic Cropping, De-skewing, Dynamic Threshold, White Level from Paper, Image Emphasis (5 steps), Gamma Correction, Automatic Separation, Noise Reduction, Shadow Removal, Mirror Image, Monochrome Reversing, 2-Page Separation and much more.
OTHER FUNCTIONS		Zone OCR (a function of the Image Capture Plus software that adds characters from the document to the output file name), Separation Sheet, Single-Touch Scan Keys, Double-Feed Skip Key
DOCUMENT	SIZE (ADF)	Minimum 1.9 in. x 2.8 in. (48 mm x 70 mm) length
		Maximum 8.5 in. x 100 in. (216 mm x 2,540 mm) length
	WEIGHT/THICKNESS*2	Single 5.4 lbs. - 55 lbs. (20 - 209 g/m²)
		Continuous 5.4 lbs. - 55 lbs. (20 - 209 g/m²)
Card Up to approx. 0.03 in. (0.76 mm) in thickness + embossing (ISO standard 7810 ID-1 card scanning including embossed card)		
AUTOMATIC DOCUMENT FEEDER		Up to 50 sheets (20 lbs., 80 g/m²), 3 hard cards (ISO 7810 ID-1)
SUPPORTED OPERATING SYSTEM		Windows® XP SP3 or later (32-bit), Windows Vista® SP2 or later (32/64-bit), Windows® 7 and Windows® 8 (32/64-bit)
INTERFACE		High-Speed USB 2.0, Up to 480 Mbps transfer rate
POWER REQUIREMENT		AC 100 - 120 V 50/60 Hz, AC 200 - 240 V 50/60 Hz
POWER CONSUMPTION		Scanning mode 17 W or less
		Idle mode 4.5 W or less
		Sleep mode 1.6 W or less
		Power off mode 0.3 W or less
OPERATING ENVIRONMENT		Temperature 50 °F - 95 °F (10 °C - 35 °C)
		Humidity 20 % RH - 80 % RH
STORAGE ENVIRONMENT		Temperature 32 °F - 104 °F (0 °C - 40 °C)
		Humidity 10 % RH - 80 % RH
EXTERNAL DIMENSIONS*3 (W x D x H)		11.9 in. x 7 in. x 5.4 in. (303 mm x 177 mm x 137 mm) without Feed tray
WEIGHT*3		5.9 lbs. (2.7 kg)
ACCESSORIES		DVD-ROM : Drivers and Utilities (for Windows®) / User Manuals Driver software ISIS® / TWAIN Application software Image Capture Plus
		Safety Guide, Quick Reference Guide, Mixed batch card guide, AC adapter & Power cord, USB cable
OPTIONS	ROLLER EXCHANGE KIT	KV-SS058 (Double-feed prevention roller x 1, Paper feed roller x 1)
	ROLLER CLEANING PAPER	KV-SS03

Dimensions

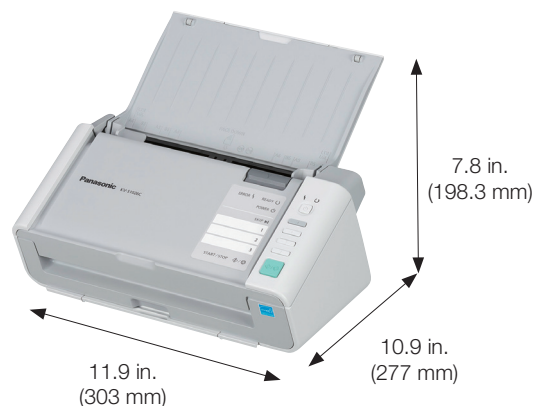

As an ENERGY STAR® partner, Panasonic has determined that this product meets the ENERGY STAR guidelines for energy efficiency.



IMAGE Capture | Plus
IMAGE Capture Plus



*1 The scanning speed differs depending on the host computer, the operating system, the application, the measuring method, the quantity of data in the image, and the paper type. The scanning speed depends on a measuring method of Panasonic.

*2 "Weight in pounds" of paper represents the weight of 500 (17 x 22 inches / 432 x 559 mm) sheets.

*3 Dimensions and weight are approximate.

Trademarks and registered trademarks

- ENERGY STAR and the ENERGY STAR mark are registered U.S. marks.
- ABBYY is a registered trademark of ABBYY Software House.
- ISIS is a registered trademark or trademark of EMC Corporation in the United States and other countries.
- Microsoft, Windows and Windows Vista are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- All other brand or product names are the property of their respective holders.

This product is designed to reduce hazardous chemical substances in accordance with the RoHS directive.