


PRODUCT SPECIFICATIONS

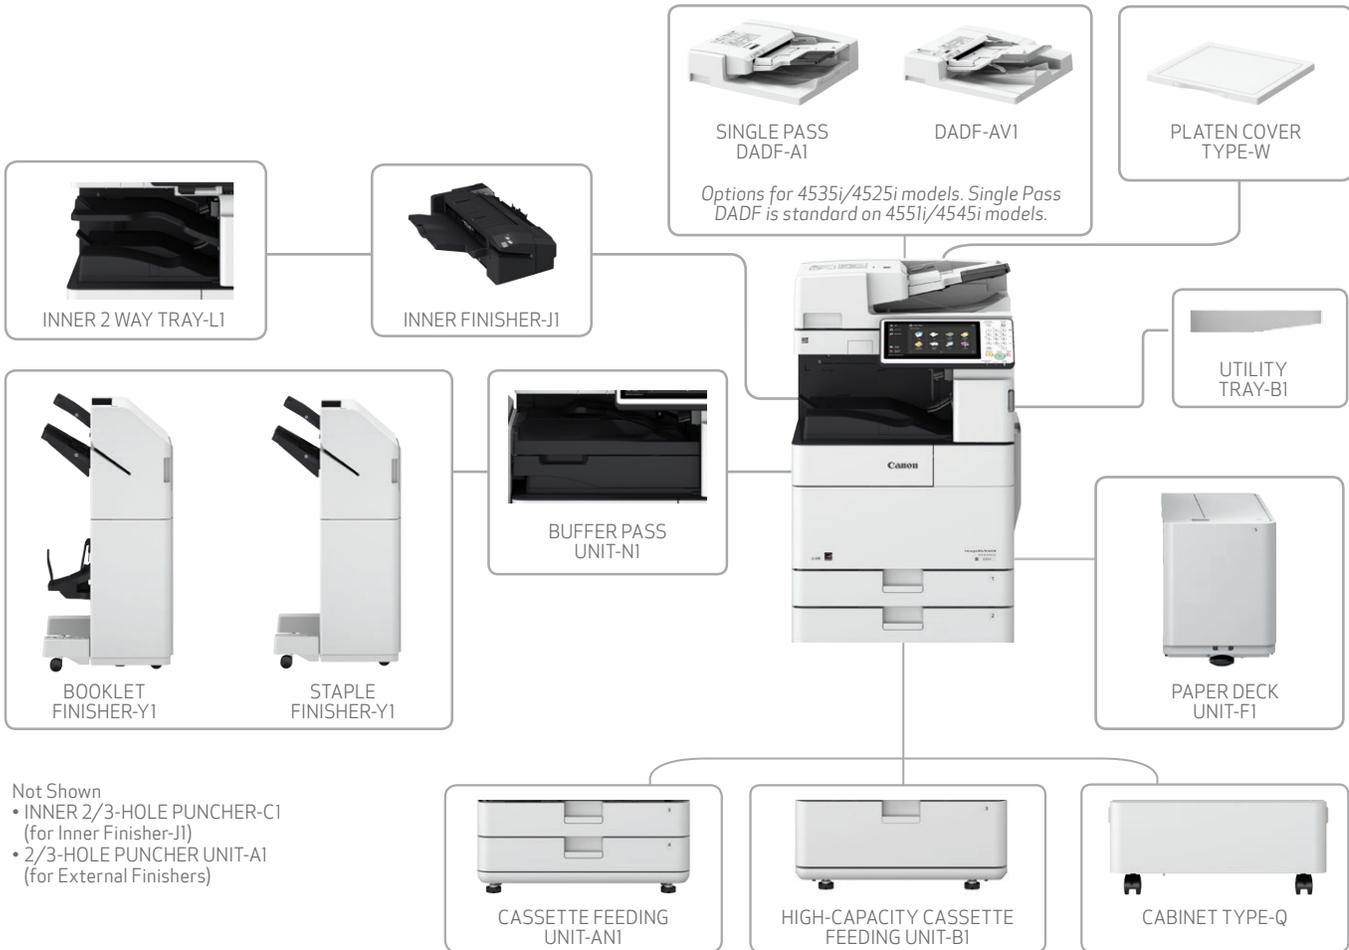

Not Shown
 • INNER 2/3-HOLE PUNCHER-C1 (for Inner Finisher-J1)
 • 2/3-HOLE PUNCHER UNIT-A1 (for External Finishers)

Main Unit

Type
 Monochrome Laser Multifunctional

Core Functions
 Standard: Print, Copy, Scan, Send, Store
 Optional: Fax

Processor
 Canon Dual Custom Processor (Shared)

Control Panel
 10.1" TFT LCD WSVGA Color Touch-panel

Memory
 3.0 GB RAM

Hard Disk Drive
 Standard: 250 GB
 Maximum: 1 TB

Mirroring Hard Disk Drive

Optional (250 GB, 1 TB)
 Method: Raid1

Print Resolution

1200 dpi x 1200 dpi

Interface Connection

Network
 Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n)
 Optional: NFC, Bluetooth

Others
 Standard: USB 2.0 x2 (Host), USB 3.0 x1 (Host), USB 2.0 x1 (Device)
 Optional: Serial Interface, Copy Control Interface

Paper Capacity (LTR, 20 lb. Bond)

Standard: 1,180 Sheets
 Maximum: 6,330 Sheets

Paper Sources (LTR, 20 lb. Bond)

Standard: Two 550-sheet Paper Cassettes, 80-sheet Stack Bypass

Optional: Two 550-sheet Paper Cassettes (Cassette Feeding Unit-ANI), 2,450-sheet Paper Deck (High Capacity Cassette Feeding Unit-BI), 2,700-sheet Paper Deck (Paper Deck Unit-FI)

Paper Output Capacity (LTR, 20 lb. Bond)

Standard: 250 Sheets
Maximum: 3,350 Sheets (with External Finishers)

Finishing Capabilities

Standard: Collate, Group

With Inner Finisher: Collate, Group, Offset, Staple, Hole Punch,¹ Staple-Free Staple, Staple On Demand

With External Finisher: Collate, Group, Offset, Staple, Booklet,² Staple-Free Staple, Staple On Demand, Hole Punch³



Supported Media Types

Paper	Thin, Plain, Recycled, Color, Heavy,
Cassettes:	Pre-punched
Stack Bypass:	Thin, Plain, Recycled, Color, Heavy, Pre-punched, Bond, Transparency, Label, Envelope

Supported Media Sizes

Paper	Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 11-3/4" x 15-3/8")
Cassette (1):	
Paper	11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 11-3/4" x 15-3/8")
Cassette (2):	
Stack Bypass:	11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelope [No.10 (COM10), Monarch, DL, ISO-C5], Custom Size (3-7/8" x 5-7/8" to 11-3/4" x 17")

Supported Media Weights

Paper	
Cassettes:	16 lb. Bond to 34 lb. Bond (60 to 128 g/m ²)
Stack Bypass:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Duplexing:	16 lb. Bond to 28 lb. Cover (60 to 105 g/m ²)

Warm-up Time

From Power	
On:	24 Seconds or Less
From Deep	
Sleep Mode:	10 Seconds or Less
Quick Startup	
Mode:	4 Seconds ⁴

Dimensions (W x D x H)

23-1/8" x 29-1/8" x 47" (587 mm x 740 mm x 1,193 mm)⁵

Installation Space (W x D)

Basic [With ADF (Stack Bypass and Cassette Drawers Open)]: 35" x 46-1/2" (889 mm x 1,182 mm)
Fully Configured [With ADF+Paper Deck Unit-F1+
Booklet Finisher-Y1 (Cassette Drawers Open)]:
71-3/8" x 50-3/8" (1,811 mm x 1,280 mm)

Weight

Approx. 240.7 lb. (109.2 kg)⁶

Print Specifications

Print Speed

4551i:	Up to 51 ppm (Letter); Up to 37 ppm (Letter-R); Up to 25 ppm (Legal); Up to 25 ppm (11" x 17")
4545i:	Up to 45 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4535i:	Up to 35 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4525i:	Up to 25 ppm (Letter); Up to 17 ppm (Letter-R); Up to 13 ppm (Legal); Up to 15 ppm (11" x 17")

Standard Page Description Languages

UFR II, PCL[®]6, Adobe[®] PS[®] 3

Direct Print

Available from USB, Advanced Box, Remote UI,
and Web Access (Opt.)⁷

Supported File Types for Direct Print

PDF, TIFF, JPEG, EPS, XPS

Printing from Mobile Devices and Cloud-based Services

A range of software and MEAP-based solutions are
available to provide printing from mobile devices or
Internet-connected devices and cloud-based services
depending on your requirements.

Fonts

PCL fonts:	93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T (Japanese, Korean, Simplified and Traditional Chinese), ⁸ Barcode Fonts ⁹
PS fonts:	136 Roman

Operating System¹⁰

UFR II:	Windows Vista [®] /Server 2008/Windows [®] 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/ Windows 10, MAC OS X (10.6.8 or later)
PCL:	Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/ Windows 10
PS:	Windows Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/ Windows 10, MAC OS X (10.6.8 or later)
PPD:	MAC OS 9.1 or later, MAC OS X (10.3.9 or later), Windows Vista/Windows 7/ Windows 8/Windows 8.1/Windows 10

Print Features

Suspend Job Timeout, Subset Finishing (PS only),
Profile Settings, Secured Print, Forced Hold Printing,
Watermark, Page Border, Header/Footer, Page Layout,
Two-sided Printing, Collating, Booklet Printing, Grouping,
Mixed Paper Sizes/Orientations, Offsetting, Printing on
Transparencies, Front/Back Covers, Toner Reduction,
Poster Printing

Copy Specifications

Copy Speed

4551i:	Up to 51 ppm (Letter); Up to 37 ppm (Letter-R); Up to 25 ppm (Legal); Up to 25 ppm (11" x 17")
4545i:	Up to 45 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4535i:	Up to 35 ppm (Letter); Up to 32 ppm (Letter-R); Up to 25 ppm (Legal); Up to 22 ppm (11" x 17")
4525i:	Up to 25 ppm (Letter); Up to 17 ppm (Letter-R); Up to 13 ppm (Legal); Up to 15 ppm (11" x 17")

First-Copy-Out Time (Letter)

4551i:	As fast as 3.7 seconds
4545i:	As fast as 3.8 seconds
4535i:	As fast as 3.8 seconds
4525i:	As fast as 5.2 seconds

Copy Resolution

Reading:	Up to 600 dpi x 600 dpi
Printing:	1200 dpi x 1200 dpi

Multiple Copies

Up to 999 copies

Copy Exposure

Automatic or Manual (9 Levels)

Magnification

25%-400% (1% Increments)

Preset Reductions

25%, 50%, 64%, 73%, 78%

Preset Enlargements

121%, 129%, 200%, 400%

Basic Copy Features

Preset Reduction/Enlargement Ratios by Area, Paper
Setting, Previous Settings, Favorite Settings, Finishing,
Two-Sided, Density Adjustment, Original Type Selection,
Interrupt Mode, Setting Confirmation/Cancel

Special Copy Features

Book to Two Pages, Two-sided Original, Finishing,
Booklet, Job Build, N on 1, Add Cover, Insert Sheets,
Different Size Originals, Density Adjustment, Original
Type Selection, Transparency Cover Sheets, Page
Numbering, Copy Set Numbering, Sharpness, Erase
Frame, Secure Watermark, Print Date, Shift, Gutter,
Print & Check, Negative/Positive, Repeat Images,
Merge Job Blocks, Job Done Notice, Mirror Image,
Store in Mail Box, Superimpose Image, Copy ID Card,
Detect Feeder Multi Sheet Feed, Free Size Original

Scan Specifications

Type

4551i/4545i:	Standard Single Pass Duplexing Automatic Document Feeder
4535i/4525i:	Optional Single Pass Duplexing Automatic Document Feeder or Duplexing Automatic Document Feeder

Document Feeder Paper Capacity

Single Pass DADF-A1: 150 Sheets (20 lb. Bond)
DADF-AV1: 100 Sheets (20 lb. Bond)

Document Feeder Supported Media Sizes

11" x 17", Legal, Letter, Letter-R, Statement, Statement-R

Document Feeder Supported Media Weights

Single Pass DADF-A1	
BW Original:	13 lb. Bond to 58 lb. Cover (50 to 157 g/m ²)
CL Original:	17 lb. Bond to 58 lb. Cover (64 to 157 g/m ²)
DADF-AV1	
BW Original:	13 lb. Bond to 34 lb. Bond (50 to 128 g/m ²)
CL Original:	17 lb. Bond to 34 lb. Bond (64 to 128 g/m ²)

Platen Acceptable Originals

Sheet, Book, 3-Dimensional Objects [Up to 4.4 lb. (2 kg)]

Pull Scan

Color Network ScanGear2 for both Twain and WIA

Supported OS:	Windows Vista/7/8/8.1/10 Windows Server 2008/Server 2008 R2/ Server 2012/Server 2012 R2
---------------	---

Scan Resolution

600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 400 dpi,
200 x 200 dpi, 200 x 100 dpi, 150 x 150 dpi, 100 x 100dpi

Scan to Mobile Devices and Cloud-based Services

A range of solutions is available to provide scanning to
mobile devices and cloud-based services depending on
your requirements.

Scan Speed (Letter)

Single Pass DADF-A1	
Single-sided Scanning (BW):	80 ipm (300 dpi)/80 ipm (600 dpi)
Single-sided Scanning (Color):	80 ipm (300 dpi)/60 ipm (600 dpi)
Double-sided Scanning (BW):	160 ipm (300 dpi)/150 ipm (600 dpi)
Double-sided Scanning (Color):	160 ipm (300 dpi)/80 ipm (600 dpi)
DADF-AV1	
Single-sided Scanning (BW):	70 ipm (300 dpi)/51 ipm (600 dpi)
Single-sided Scanning (Color):	70 ipm (300 dpi)/51 ipm (600 dpi)
Double-sided Scanning (BW):	35 ipm (300 dpi)/25.5 ipm (600 dpi)
Double-sided Scanning (Color):	35 ipm (300 dpi)/25.5 ipm (600 dpi)

Send Specifications

Destination

E-mail/Internet Fax (SMTP), SMB, FTP, WebDAV, Mail Box, Super G3 Fax (Optional), IP Fax (Optional)

Color Mode

Automatic-Color Select (Full Color/Grayscale), Automatic-Color Select (Full Color/Black-and-White), Full color, Grayscale, and Black-and-White

Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

Send Resolution

600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi, 150 x 150 dpi, 100 x 100dpi

Communication Protocol

File: FTP, SMB v3.0, WebDAV

E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

File Format

Standard: TIFF, JPEG, PDF(Compact, Searchable, Apply policy, Optimize for Web, PDF A/1-b), XPS (Compact, Searchable), Office Open XML (PowerPoint®, Word)

Optional: PDF (Trace & Smooth, Encrypted), PDF/XPS (Digital Signature)

Universal Send Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Delayed Send, Preview, Finished Stamp, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals, Detect Feeder Multi Sheet Feed

Fax Specifications

Maximum Number of Connection Lines

4

Modem Speed

Super G3: 33.6 Kbps

G3: 14.4 Kbps

Compression Method

MH, MR, MMR, JBIG

Resolution

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi

Sending/Recording Size

Statement-R to 11" x 17"

Fax Memory

Up to 30,000 pages

Speed Dials

Max. 200

Group Dials/Destinations

Max. 199 dials

Sequential Broadcast

Max. 256 addresses

Memory Backup

Yes

Fax Features

Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density for Scanning, Sharpness, Copy Ratio, Erase Frame, Job Build, Specifying the Sender's Name (when sending fax), Sender's Name (TTI), Select Line, Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Finished Stamp, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed

Store Specifications

Mail Box (Number Supported)

100 User In-boxes, 1 Memory RX In-box, 50 Confidential Fax In-boxes, 30,000 Maximum Pages Stored

Advanced Box

Communication Protocol: SMB or WebDAV

Supported

Client PC: Windows (Windows Vista/7/8/8.1/10)

Concurrent Connections (Max.)

SMB: 64

WebDAV: 3 (Active Sessions)

Advanced Box Available Disk Space

Approx. 16 GB (Standard HDD)

Approx. 480 GB (1 TB HDD)

Advanced Box Features:

Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

Memory Media

Standard: USB

Security Specifications

Authentication

Standard: Universal Login Manager, User Authentication, Department ID Authentication, Access Management System, Device and Function Level Log-in

Optional: uniFLOW

Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption(FIPS140-2 Validated)

Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

Network

Standard: IP/Mac Address Filtering, IPsec, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP

Document

Standard: Secure Print, Forced Hold Printing, Adobe LiveCycle® Rights Management ES2.5 Integration

Optional: Encrypted PDF, Encrypted Secure Print, User and Device signatures, Secure Watermarks, Document Scan Locking

Environmental Specifications

Operating Environment

Temperature: 50 to 86°F

Humidity: 20 to 80% RH (no condensation)

Power Requirements

4551i: 120-127 V AC, 60 Hz, 10.4A

4545i/4535i: 120-127 V AC, 60 Hz, 9.3A

4525i: 120-127 V AC, 60 Hz, 7A

Plug (Main Unit)

NEMA 5-15P

Power Consumption

Maximum

Approx. 1.5 kWh

Standby: Approx. 38 W

Sleep Mode: Approx. 0.9 W¹¹

Typical Electricity Consumption (TEC) Rating:

4551i: 2.5 kWh

4545i: 2.2 kWh

4535i: 1.8 kWh

4525i: 1.0 kWh

Standards

ENERGY STAR® Certified

Rated EPEAT® Gold¹²

RoHS Compliant

Consumables

Toner

GPR-57 Toner BK

Toner Yield (Estimated @ 6% Coverage)

Black: 42,100 Images

Paper Supply Options

CASSETTE FEEDING UNIT-A1

Paper 550 Sheets x 2 Cassettes

Capacity: [20 lb. Bond (80 g/m²)]

Paper Type: Thin, Plain, Recycled, Color, Heavy, Pre-punched

Paper Size: 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, and Custom Size [5-1/2" x 7-1/8" to 11-3/4" x 17" (139.7 x 182.0 to 297.0 x 431.8 mm)]

Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m²)

Power Source: From the Main Unit

Dimensions 22-1/4" x 25-5/8" x 9-3/4"

(W x D x H): (565 mm x 650 mm x 248 mm)

Weight: 51.8 lb. (23.5 kg)

HIGH CAPACITY CASSETTE FEEDING UNIT-B1

Paper 2,450 sheets [20 lb. Bond (80 g/m²)]

Capacity:

Paper Type: Thin, Plain, Recycled, Color, Heavy, Pre-punched

Paper Size: Letter

Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m²)

Power Source: From the Main Unit

Dimensions 22-1/4" x 25-5/8" x 9-3/4"

(W x D x H): (565 mm x 650 mm x 248 mm)

Weight: 61.7 lb. (28 kg)

PAPER DECK UNIT-F1

Paper 2,700 Sheets [20 lb. Bond (80 g/m²)]

Capacity:

Paper Type: Thin, Plain, Recycled, Color, Heavy, Pre-punched

Paper Size: Letter

Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128 g/m²)

Power Source: From the Main Unit

Dimensions 15-3/4" x 24-7/8" x 17-3/8"

(W x D x H): (400 mm x 630 mm x 440 mm)

Weight: 68.3 lb. (31 kg)

Output Options

INNER 2-WAY TRAY-L1

Number of Trays:	2
Total Output Capacity	
Upper Tray:	100 Sheets
Lower Tray:	250 Sheets
Paper Weight	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Paper Size (Standard):	11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Envelope [No.10 (COM10), Monarch, DL, ISO-C5], Custom Size (3-7/8" x 5-7/8" to 11-3/4" x 17")
Dimensions (W x D x H):	16-3/4" x 16-1/4" x 4-1/4" (426 mm x 413 mm x 17 mm)
Weight:	1.7 lb (0.77 kg)

INNER FINISHER-J1

Number of Trays:	2
Top Tray Capacity:	Letter/Statement-R/Executive (45 Sheets), 11" x 17"/Legal/Letter-R (45 Sheets)
Lower Tray Capacity:	Letter/Statement-R/Executive (500 Sheets), 11" x 17"/Legal/Letter-R (250 Sheets)
Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Staple Position:	Corner, Double
Staple Capacity	Corner Staple and Double Staple
Letter/Executive:	50 Sheets (14 to 24 lb. Bond)
11" x 17"/Legal/Letter-R:	30 Sheets (14 to 24 lb. Bond)
Staple-Free Staple:	11"x17"/ 5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m ²)) Letter: 4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m ²)] 3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m ²)]
Staple On Demand:	40 Sheets [20 lb. Bond (80 g/m ²)]
Power Source:	From the Main Unit
Dimensions (W x D x H):	25" x 21-1/8" x 8-1/8" (636 mm x 535 mm x 205 mm) ¹³
Weight:	Approx. 15.9 lb (7.2 kg)

STAPLE FINISHER-Y1 (External)

Number of Trays:	2
Top Tray Capacity:	Letter/Executive/Statement-R (250 Sheets), 11" x 17"/Legal/Letter-R (125 Sheets)
Lower Tray Capacity:	Letter/Executive/Statement-R (3,000 Sheets), 11" x 17"/Legal/Letter-R (1,500 Sheets)
Paper Weight	
Top Tray:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Lower Tray:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)

Staple Position:	Corner, Double
Staple Capacity	Corner Staple and Double Staple
Letter/Executive:	50 Sheets [24 lb. Bond (90 g/m ²)]
11" x 17"/Legal/Letter-R:	30 Sheets [24 lb. Bond (90 g/m ²)]
Staple-Free Staple	11"x17"/ 5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m ²)) Letter: 4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m ²)] 3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m ²)]
Staple On Demand:	50 Sheets [24 lb. Bond (90 g/m ²)]
Power Source:	From the Main Unit
Dimensions (W x D x H):	25-1/8" x 24-1/2" x 45" (637 mm x 623 mm x 1,142 mm) ¹³
Weight:	Approx. 68.3 lb (31 kg)

BOOKLET FINISHER-Y1 (External)

Number of Trays:	2
Top Tray Capacity:	Letter/Executive/Statement-R (250 Sheets), 11" x 17"/Legal/Letter-R (125 Sheets)
Lower Tray Capacity:	Letter/Executive/Statement-R (3,000 Sheets), 11" x 17"/Legal/Letter-R (1,500 Sheets)
Paper Weight	
Top Tray:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Lower Tray:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Staple Position:	Corner, Double
Staple Capacity	Corner Staple and Double Staple
Letter/Executive:	50 Sheets [24 lb. Bond (90 g/m ²)]
11" x 17"/Legal/Letter-R:	30 Sheets [24 lb. Bond (90 g/m ²)]
Staple-Free Staple	11"x17"/ 5 Sheets [14 to 17 lb. Bond ((52 to 64 g/m ²)) Letter: 4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m ²)] 3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m ²)]
Staple On Demand:	50 Sheets [24 lb. Bond (90 g/m ²)]
Booklet-Stitch Paper Size:	11" x 17", Legal, Letter-R, Custom Size (7-3/4" x 10-5/8" to 11-3/4" x 17")
Booklet-Stitch Staple Capacity:	20 Sheets x 10 Sets [22 lb. Bond (81 g/m ²)] [including one cover sheet up to 80 lb. Cover (220 g/m ²)]
Power Source:	From the Main Unit
Dimensions (W x D x H):	25-1/8" x 24-1/2" x 45" (637 mm x 623 mm x 1,142 mm) ¹³
Weight:	Approx. 125.7 lb (57 kg)

INNER 2/3-HOLE PUNCHER-C1

<i>(Requires the Inner Finisher-J1)</i>	
Acceptable Punch Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Acceptable Punch Paper Size	
Two holes:	11" x 17", Legal, Letter, Letter-R, Executive
Three holes:	11" x 17", Letter, Executive
Power Source:	From the Main Unit

2/3-HOLE PUNCHER UNIT-A1

<i>(Requires either the Staple Finisher-Y1 or Booklet Finisher-Y1)</i>	
Acceptable Punch Paper Weight:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Acceptable Punch Paper Size	
Two holes:	11" x 17", Legal, Letter, Letter-R, Executive
Three holes:	11" x 17", Letter, Executive
Power Source:	From the Main Unit

Additional Hardware Options

Card Readers

MICARD PLUS PROXIMITY CARD READER
COPY CARD READER-F1
COPY CARD READER ATTACHMENT-B5

Others

PLATEN COVER TYPE W
ENVELOPE FEEDER ATTACHMENT KIT-D1
UTILITY TRAY-B1
USB KEYBOARD

Security Options

Document Security

DOCUMENT SCAN LOCK KIT-B1
SECURE WATERMARK-B1
ENCRYPTED SECURE PRINT SOFTWARE-D1
iR-ADV SECURITY KIT-S1 FOR IEEE 2600 COMMON CRITERIA CERTIFICATION ⁴

Data Security

HDD MIRRORING KIT-J1
2.5"/250 GB HDD-N1
2.5"/1 TB HDD-P1
REMOVABLE HDD KIT-AL1

System and Controller Options

Print Accessories

PCL INTERNATIONAL FONT SET-A1

Barcode Printing

BARCODE PRINTING KIT-D1

System Accessories

WEB ACCESS SOFTWARE-K1

SERIAL INTERFACE KIT-K3

COPY CONTROL INTERFACE KIT-A1

CONNECTION KIT-A1 FOR BLUETOOTH LE

NFC KIT-C1

MEAP WEB CONNECTION KIT-G3

Fax Accessories

SUPER G3 FAX BOARD-AS2

SUPER G3 2ND LINE FAX BOARD-AS2

SUPER G3 3RD/4TH LINE FAX BOARD-AS2

REMOTE FAX KIT-A1

IP FAX EXPANSION KIT-B1

Other Options

Accessibility Accessories

ADF ACCESS HANDLE-A1

VOICE GUIDANCE KIT-G1

VOICE OPERATION KIT-D1

BRAILLE LABEL KIT-F1

Consumables

STAMP INK CARTRIDGE-C1

STAPLE-P1

STAPLE CARTRIDGE-Y1

Footnotes

¹ Requires the optional Inner 2/3 Hole Puncher-C1.

² Booklet Finisher-Y1 only.

³ Requires the optional 2/3 Hole Puncher Unit-A1.

⁴ Time from device power-on to when copy jobs can be programmed.

⁵ Includes Main Unit, Single Pass DADF-A1, and Cassette Feeding Unit-ANI.

⁶ Includes Main Unit, Single Pass DADF-A1, Cassette Feeding Unit-ANI, and consumables.

⁷ PDF print from Web sites is supported.

⁸ Requires the optional PCL International Font Set-A1.

⁹ Requires the optional Barcode Printer Kit-D1.

¹⁰ Other operating systems and environments including AS/400, UNIX, Linux and Citrix may be supported. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.

¹¹ 0.9 W Sleep mode is not available in all circumstances due to certain settings.

¹² For current EPEAT rating (Gold/Silver/Bronze), please visit www.epeat.net.

¹³ When the extension tray is extended.

¹⁴ Will launch at a later date.

For more information, call or visit
1.800.815.4000 CSA.CANON.COM



Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance.

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Canon, imageRUNNER, imageWARE, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. Google Cloud Print™ is either a registered trademark or trademark of Google Inc. AirPrint and the AirPrint logo are trademarks of Apple Inc. Adobe® and PostScript® 3™ are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Microsoft® and PowerPoint® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. PCL® is a registered trademark of Hewlett-Packard Company. All other referenced product names and marks are trademarks of their respective owners. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Specifications and availability subject to change without notice. Not responsible for typographical errors.
©2016 Canon U.S.A., Inc. All rights reserved.

CSA/16-451
1216-CSAiRA45xxSSS-PDF-IH

Canon
CANON SOLUTIONS AMERICA

