

Lexmark MS811 and MS812 Series

Star performer. Stellar finish.

The Lexmark MS811 and MS812 Series produce documents that steal the show. With faster print speeds and multiple finishing options, these systems are built to satisfy the most demanding corporate offices. Want 2-sided printing capability? Get the MS811dn or MS812dn. Need productivity solutions? Get the MS812de.

Powerful productivity that sets the pace.

Stay a step ahead by getting more work done faster. These superefficient systems can meet your most demanding expectations.

Faster processing: Improve your print speeds by taking advantage of up to 2.56 GB of memory, an 800 MHz dual-core processor and Gigabit Ethernet.

Reliable high performance: Print up to 75,000 pages per month with the MS811 Series or 100,000 pages per month with the MS812 Series. Plus, enjoy fewer maintenance hassles with our state-ofthe-art paper handling.

Keep jobs moving: With a maximum input capacity of up to 4,400 sheets and an extra high yield toner cartridge, you won't have to add paper or change cartridges as often.











function





Intelligent workflow.

business data.

Secure design. Our advanced system simplifies your work processes and increases productivity. Innovative security capabilities provide maximum protection for your critical

Print anytime and anywhere8: With this system, you can print from desktops as well as mobile devices that can run applications.

Enjoy enterprise-level security: Now you can authenticate, authorize and audit employee usage. Plus, you can protect sensitive data using standard network security protocols, data encryption and disk wiping capabilities.

Identify potential risks: Track more than 100 variables and events, including user activity, with Audit Logging. It's designed to work with your intrusion detection system in real time.

Optional productivity solutions: Want to empower your business with workflow solutions that can print on demand, automate tasks and more? Get the solutions-capable MS812de.

Spend less time waiting: Print from 63 to 70 pages per minute, and produce your first page in as little as 4 seconds.

Look professional. Work smarter.

The MS811 and MS812 Series produce documents that are presentation ready, automatically finishing the pages based on your preferences. Our easy-to-use control panel makes it simple.

Easy-to-use displays: The bright 2.4-inch color display lets you stay on top of your work. Need more control and productivity solutions? Get the MS812de with the 7-inch color touch screen.


Finishing that adds polish: Produce projects like a pro with automated collating, stapling and other finishing features.

Print on a wide range of media: With builtin 2-sided printing⁷ and the ability to print on diverse materials, you can do more for your business and use less paper.

Innovative toner optimizes performance: Get greater system performance with Lexmark's Unison™ Toner, which delivers consistent quality from first print to last

Duplex (two-sided printing) models are ENERGY STAR compliant, MS811dn/dtn, MS812dn/dtn and MS812de only. For more information on Lexmark Mobile Solutions see: lexmark.com/mobile

MS811 and MS812 Series printer features

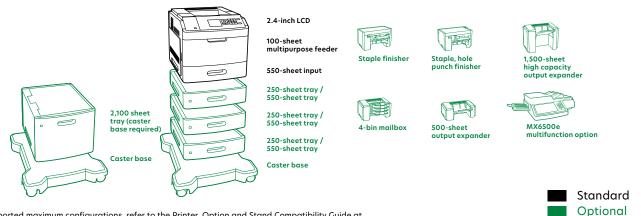

*For supported maximum configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/

| Product specifications | Lexmark MS811dn | Lexmark MS812dn | Lexmark MS812de |
|--|---|------------------------|--|
| Printing | | | |
| Display | 2.4-inch (6 cm) color LCD display | | Lexmark e-Task 7-inch (17.8 cm) color touch screen |
| Print Speed: Up to ⁷ | Black: 63 ppm | Black: 70 ppm | |
| Time to First Page: As fast as | Black: 4.4 seconds | Black: 4.0 seconds | |
| Print Resolution | Black: 600 x 600 dpi, 1200 Image Quality, 2400 Image Quality, 1200 x 1200 dpi | | |
| Memory / Processor | Standard: 512 MB / Maximum: 2560 MB / Dual Core, 800 MHz | | |
| Hard Disk | Option available | | |
| Recommended Monthly Page Volume⁵ | 5000 - 75000 pages | 5000 - 100000 pages | |
| Maximum Monthly Duty Cycle: Up to ⁶ | 300000 pages per month | 350000 pages per month | |
| Supplies ^₄ | | | |
| Laser Cartridge Yields (up to)1 | 45,000-page Extra High Yield Cartridge, 25,000-page High Yield Cartridge, 6,000-page Cartridge | | |
| Imaging Unit Estimated Yield: Up to ² | 100000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage | | |
| Cartridge(s) Shipping with Product ¹ | 10,000-page Starter Return Program Toner Cartridge | | |
| Paper Handling | | | |
| Included Paper Handling | 550-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Input | | |
| Optional Paper Handling | 4-Bin Mailbox, Staple Finisher, Output Expander, Staple Punch Finisher, 250-Sheet Lockable Tray, 2100-Sheet Tray, High Capacity Output Expander, 550-Sheet Tray, 250-Sheet Tray, 550-Sheet Lockable Tray | | |
| Paper Input Capacity: Up to | Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4400 pages 20 lb or 75 gsm bond | | |
| Paper Output Capacity: Up to | Standard: 550 pages 20 lb or 75 gsm bond / Maximum: 2550 pages 20 lb or 75 gsm bond | | |
| Media Types Supported | Paper Labels, Envelopes, Refer to the Card Stock & Label Guide., Card Stock, Dual Web Labels, Integrated Labels, Transparencies, Plain Paper | | |
| Media Sizes Supported | C5 Envelope, 10 Envelope, Oficio, Letter, B5 Envelope, Universal, Legal, A5, Folio, 7 3/4 Envelope, Statement, A4, 9 Envelope, A6, Executive, DL Envelope, JIS-B5 | | |
| General Information ³ | | | |
| Standard Ports | Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi-Speed Certified (Type B), One Internal Card Slot, Front USB 2.0 Specification Hi-Speed Certified port (Type A) | | Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), Gigabit Ethernet (10/100/1000), USB 2.0 Specification Hi- Speed Certified (Type B), One Internal Card Slot, Front USB 2.0 Specification Hi-Speed Certified port (Type A) |
| Optional Network Ports / Optional Local Ports | Internal MarkNet N8350 802.11b/g/n Wireless / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial | | |
| Noise Level: Operating | Print: 57 dBA Print: 58 dBA | | |
| Specified Operating Environment | Altitude: 0 - 2896 Meters (9,500 Feet), Humidity: 8 to 80% Relative Humidity, Temperature: 16 to 32°C (60 to 90°F) | | |
| Limited Warranty - See Statement of Limited Warranty | 1-Year Exchange Service, Next Business Day | | |
| Size (in H x W x D) / Weight (lb.) | 16.5 x 16.7 x 20.1 in. / 52.2 lb. | | 16.5 x 16.7 x 20.1 in. / 52.9 lb. |

¹Average standard page yield value declared in accordance with ISO/IEC 19752. ²Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ³Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁴Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ⁶"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁷Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

The MS812 is a Class A device according to the FCC Rules and international electromagnetic emissions standards. This device is not intended for use in residential or domestic environments due to potential interference to radio communications.

© 2015 Lexmark and the Lexmark logo are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. All other trademarks are the property of their respective owners. ENERGY STAR® is a U.S. registered mark.

AirPrint and the AirPrint logo are trademarks of Apple Inc.



