

ES9465/ES9475



Fast, versatile, compact A3 Color MFPs with a unique OKI® LED-based print engine

Product Highlights:


- A3 MFP with LED-based print engine
- Print/Scan/Copy functionality with optional Fax
- Fast print/copy speeds – up to 50 ppm/cpm Color and Mono¹
- 100-sheet RADF (part of standard configuration)
- Open architecture (Smart Extendable Platform) for Web-based solutions
- Tilting top panel with 9" LCD touchscreen (same as OKI A4 devices)
- Scan to /print from USB memory drive
- High-security, self-encrypting hard drive
- Handles media from 4"x6" to 12" x 47" banners; paper weight up to 100 lb. cover (280 gsm)
- Smallest footprint, lightest weight, lowest noise levels
- Three (3) finishing options; paper capacity expands to 3,200 sheets

Components and Dimensions (W x D x H):



As configured:
51.7" x 25.3" x 47.8"
(including stabilizers)

As configured:
23" x 25.3" x 47.8"
(including stabilizers)

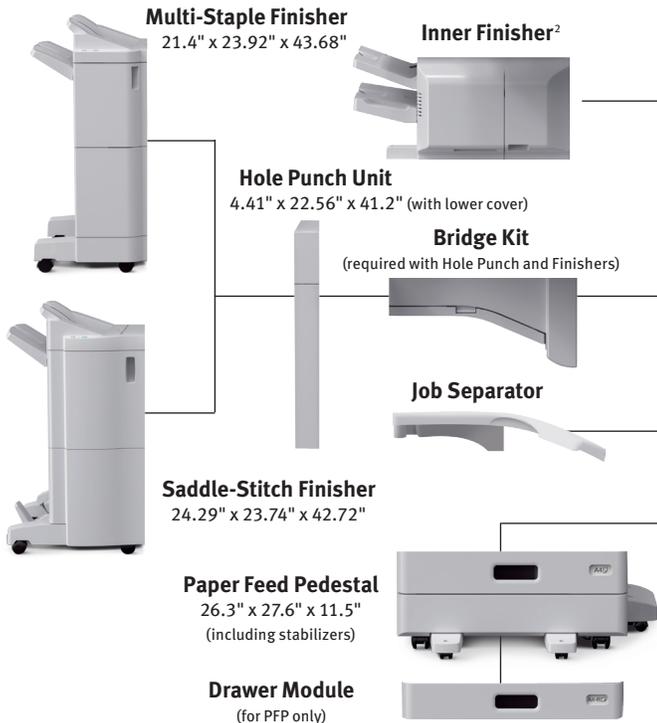

Tilting Operator Panel
with 9" LCD Touchscreen Display



Base Unit
23" x 25.3" x 36.3"
(including RADF)



Large Capacity Feeder
26.3" x 28.9" x 11.5"
(including stabilizers)



Desk/Stand
26.3" x 28.9" x 11.5"
(including stabilizers)

Ordering Information

Description	Part No.
ES9465 Color MFP (120V)	62443903
ES9475 Color MFP (120V)	62444003
Options	
550-sheet Paper Feed Pedestal (PFP)	45587501
2,000-sheet Large Capacity Feeder (LCF)	45587602
Drawer Module (550-sheet capacity; for use with PFP only)	45588001
Multi-Staple Finisher	45587301
Saddle-Stitch Finisher	45587101
Hole Punch Unit	45587401
Bridge Kit (required with Hole Punch, and Multi-Staple and Saddle-Stitch finishers)	45588101
Inner Finisher (for ES9465 only)	45587001
Desk/Stand	45588601
Job Separator (not for use with finishing options)	45011902

Options continued

Fax Unit	45588701
Wireless Antenna	45518001
Wireless LAN Adapter	45517901
IP Sec Enabler	45518401
Data Overwrite Enabler	45518101
Custom Card Reader Bracket	70065203
TWN-4 -P Multi format Card Reader – White	70064910
TWN-4-PI Multi format Card Reader – White	70064912

Supplies

Cyan Toner Cartridge 28,000 pg. ³	45643507
Magenta Toner Cartridge 28,000 pg. ³	45643506
Yellow Toner Cartridge 28,000 pg. ³	45643505
Black Toner Cartridge 32,000 pg. ³	45643508
Waste Toner Box 28,000 pg. ⁴	45639502

ES9465/ES9475

Specifications

Printer	
Print Speed ¹	ES9465: Up to 35 ppm Color and Mono ES9475: Up to 50 ppm Color and Mono
Time to First Page ¹	ES9465: As fast as 8.1 sec. Color, 6.4 sec. Mono ES9475: As fast as 6.1 sec. Color, 4.7 sec. Mono
Print Resolution	Up to 600 x 1200 dpi
Duplex Printing	Standard
Processor	1.2 GHz CPU
Emulations	PostScript® 3™, PCL® 6, PCL 5c, PCL 5e, XPS®
Interfaces	High-speed USB 2.0, USB Host x2); 1 GB (1000 Base-T) Ethernet; Optional Wireless (802.11 b/g/n)
Operating Systems	Windows® 8, Windows 7, Windows Vista®, Windows XP, Windows Server 2012, Windows Server 2008, Windows Server 2008 R2, Windows Server 2003; Mac® OS 10.4.11 – 10.8
Memory	2 GB (standard and max.)
File Storage	320 GB Secure Hard Disk Drive
Monthly Duty Cycle	ES9465: 175,000 pages; ES9475: 225,000 pages

Copier	
Copy Speed ¹	ES9465: Up to 35 cpm Color and Mono ES9475: Up to 50 cpm Color and Mono
First Copy Out Time ¹	ES9465: As fast as 8.1 sec. Color, 6.4 sec. Mono ES9475: As fast as 6.1 sec. Color, 4.7 sec. Mono
Copy Resolution	Up to 600 x 600 dpi
Copy Scaling	25% to 400%
Max Number of Copies	Up to 999
Copy Functionality	Duplex, 2-Up, 4-Up, Collate, Mixed size (Letter/Legal), Job build, Interrupt, Cover sheet, Sheet insertion, Edge erase, ID copy and more
RADF Capacity	100-sheet Reversing Auto Document Feeder

Scanner	
Scan Type	Color/B&W flatbed (max scan area 11" x 17")
Scan Speed	Up to 73 sheets/min. (depending on scan resolution)
Scan Resolution	Up to 600 x 600 dpi
Scan Modes	Color, Black & White, Grayscale
Compatibility	TWAIN, Remote TWAIN, WS, WIA (Windows)
Formats Supported	TIFF, XPS, PDF, Slim PDF, JPEG
Scan-to Capabilities	Filing box, Shared folder, Email, FTP, USB memory, Hard disk drive, WS scan

Optional Fax	
Fax Modem Speed	33.6 Kbps Super G3
Transmission Speed	Approx. 3 sec. per page ⁵
Fax Resolution	Up to 300 x 300 dpi
Address Book Management	LDAP (3,000 entries)
Broadcast Transmission	Max 400 destinations; Group broadcast max 2,000 destinations
Fax Memory	1 GB (shared)
Fax Functionality	Mailboxes (300), Chain dial (128 digits), Auto re-dial, Memory transmission, Delayed transmission, Polling, Journal report

Paper Handling	
Standard Paper Input	1,200 sheets: 550-sheet Trays 1 and 2 plus 100-sheet Multi-purpose Tray (MPT)
Max Paper Input	3,200 sheets: 2,000-sheet Large Capacity Feeder (LCF), 550-sheet Trays 1 and 2 plus 100-sheet MPT
Input Options	550-sheet Paper Feed Pedestal (PFP); 550-sheet Drawer module for PFP; 2,000-sheet LCF
Finishing Capabilities	500-sheet Inner Finisher ² ; 2,250-sheet Multi-Staple Finisher; 3,250 Saddle-Stitch Finisher; 150- to 250-sheet Job Separator
Paper Sizes	Trays 1 and 2, PFP, Drawer module and Duplex: 5.5" x 8.5" to 12" x 18 (Tabloid Extra/A3); LCF – 8.5" x 11"; MPT: 4.6" to 47"; RADF: 11" x 17" max
Paper Weight	Trays 1/2/3, PFP, Drawer module and Duplex: 16 lb. bond–140 lb. index (60–256 gsm); LCF: 17 lb.–28 lb. bond (64–105 gsm); MPT: 16 lb. bond–100 lb. cover (60–280 gsm); RADF: 9.3 lb.–41.8 lb. bond (35–157 gsm)

Operator Panel	
Features	9" color graphic LCD tilting touch-screen display; alphanumeric keypad and function buttons

Document/Workflow Management	
OKI Smart Extendable Platform Technology	Flexible open architecture; Web Services-based software applications (print and scan) available via device's touch-screen Operator Panel

Environmental	
Size (WxDxH)	23" x 25.3" x 31" (585 mm x 643 mm x 787 mm)
Weight	166.4 lb. (75.5 kg) without consumables
Temperature/Humidity	50°F ~ 86°F (10°C ~ 30°C), 20% ~ 85% RH
Power Consumption	1.5kW max.
Noise Levels	Active: 71.0dBA or less; Idle: 51dBA or less

Warranty	
LED Printheads	5-Year limited warranty

¹ ES9475 model. ES9465 at 35 ppm/cpm Color and Mono. Published performance results based on laboratory testing of letter-size sheets, simplex. Individual results may vary.

² Available for ES9465 model only.

³ Based on 6% coverage, letter-size sheets, simplex. Units ship with full-size toner cartridges.

⁴ Based on 3 pages per job.

⁵ Based on ITU-T Test Sheet #1.

Specifications are subject to change without notice.

Featured products may not be available in all countries. Please contact your local office for regional availability.

© 2014 Oki Data Americas, Inc. OKI Reg. T.M., M.D., Oki Electric Industry Co., Ltd. PostScript Reg. T.M., PostScript 3 T.M., Adobe Systems, Inc. PCL Reg. T.M., Hewlett-Packard Co. Windows, Windows Vista Reg. T.M., Microsoft Corp. XPS Reg. T.M., Dell, Inc. Mac Reg T.M., Apple Inc. ENERGY STAR Reg. T.M., US EPA.

Printed in the USA

MS16104-0414

OKI DATA AMERICAS, INC.

USA
2000 BISHOPS GATE BLVD.
MOUNT LAUREL, NJ 08054-4620
TEL: 800.OKI.DATA (800.654.3282)
FAX: 856.222.5320

CANADA
4140B SLADEVIEW CRESCENT
UNITS 7 & 8
MISSISSAUGA, ONTARIO L5L 6A1
TEL: 905.608.5000
FAX: 905.608.5040

WWW.OKIDATA.COM



OKI[®]
Open up your dreams